

# LUXE

## SURFACE MOUNT



72670 - LUXE SurfaceMount for iPad A16 Black

72671 - LUXE SurfaceMount for iPad A16 White

72672 - LUXE SurfaceMount for iPad mini A17 Black

72673 - LUXE SurfaceMount for iPad mini A17 White

72674 - LUXE SurfaceMount for iPad Air 11-inch Black

72675 - LUXE SurfaceMount for iPad Air 11-inch White

72676 - LUXE SurfaceMount for iPad Air 13-inch Black

72677 - LUXE SurfaceMount for iPad Air 13-inch White

# LUXE SURFACE MOUNT

## IPORT LUXE SURFACE MOUNT Install Manual

The All-New LUXE Surface Mount redefines iPad installation with power built directly in. Machined aluminum, PoE+ connectivity, and compatibility with any 1G box make it sleek and globally installed.

Available in White Satin or Black Onyx, it's the perfect foundation for premium environments; functional, flexible, and beautifully refined.

### **Whats in box:**

- 1 - IPORT LUXE SURFACE MOUNT Enclosure
- 1 - IPORT Security tool - 1.5mm hex key
- 1 - PoE+ Adapter preinstalled
- 4 - Drywall anchors and screws


### **Product Info Page**

<https://iport.io/products/lxsm>

# LUXE

## SURFACE MOUNT

1. Remove the enclosure and tool from the box and place on a table.

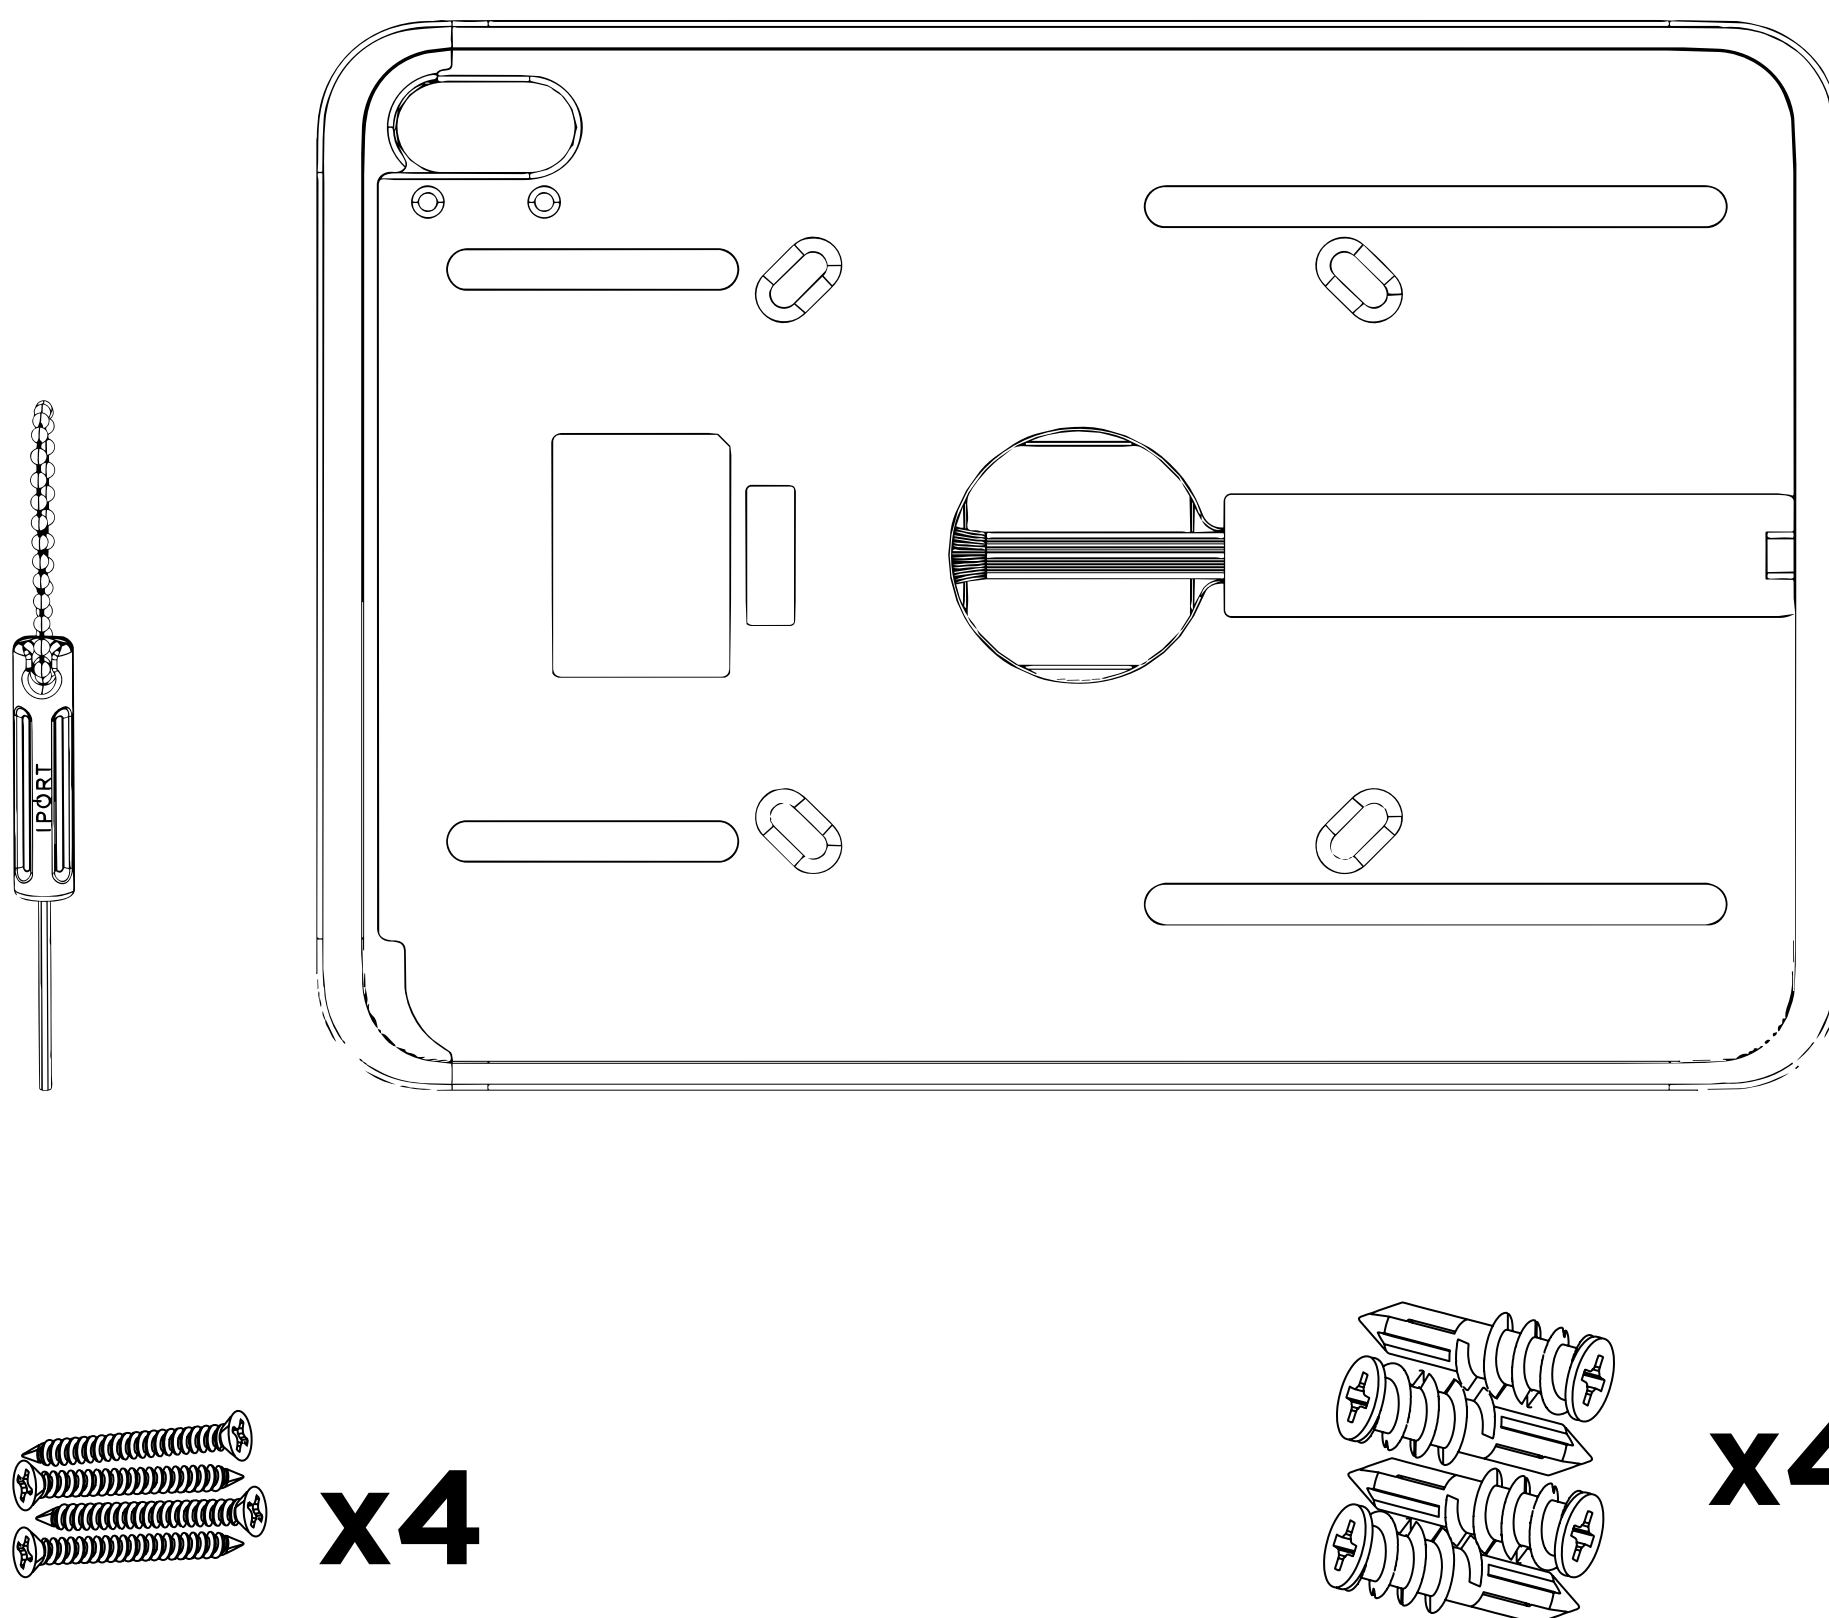



2. Identify the desired install location on the wall. You can install the LUXE SURFACE MOUNT over a 1G or 2G USA and EU electrical box. If not installing into a gang box use a 2-3/4" (70mm) hole saw to allow for the PoE+ electronics to fit into the wall.

**NOTE:** An electrical box is not needed unless otherwise required by local codes authorities.

# LUXE

## SURFACE MOUNT

- 3. Place the LUXE SURFACE MOUNT over the electrical gang box or hole and use a level to level and mark the mounting holes of the LUXE SURFACE MOUNT.**

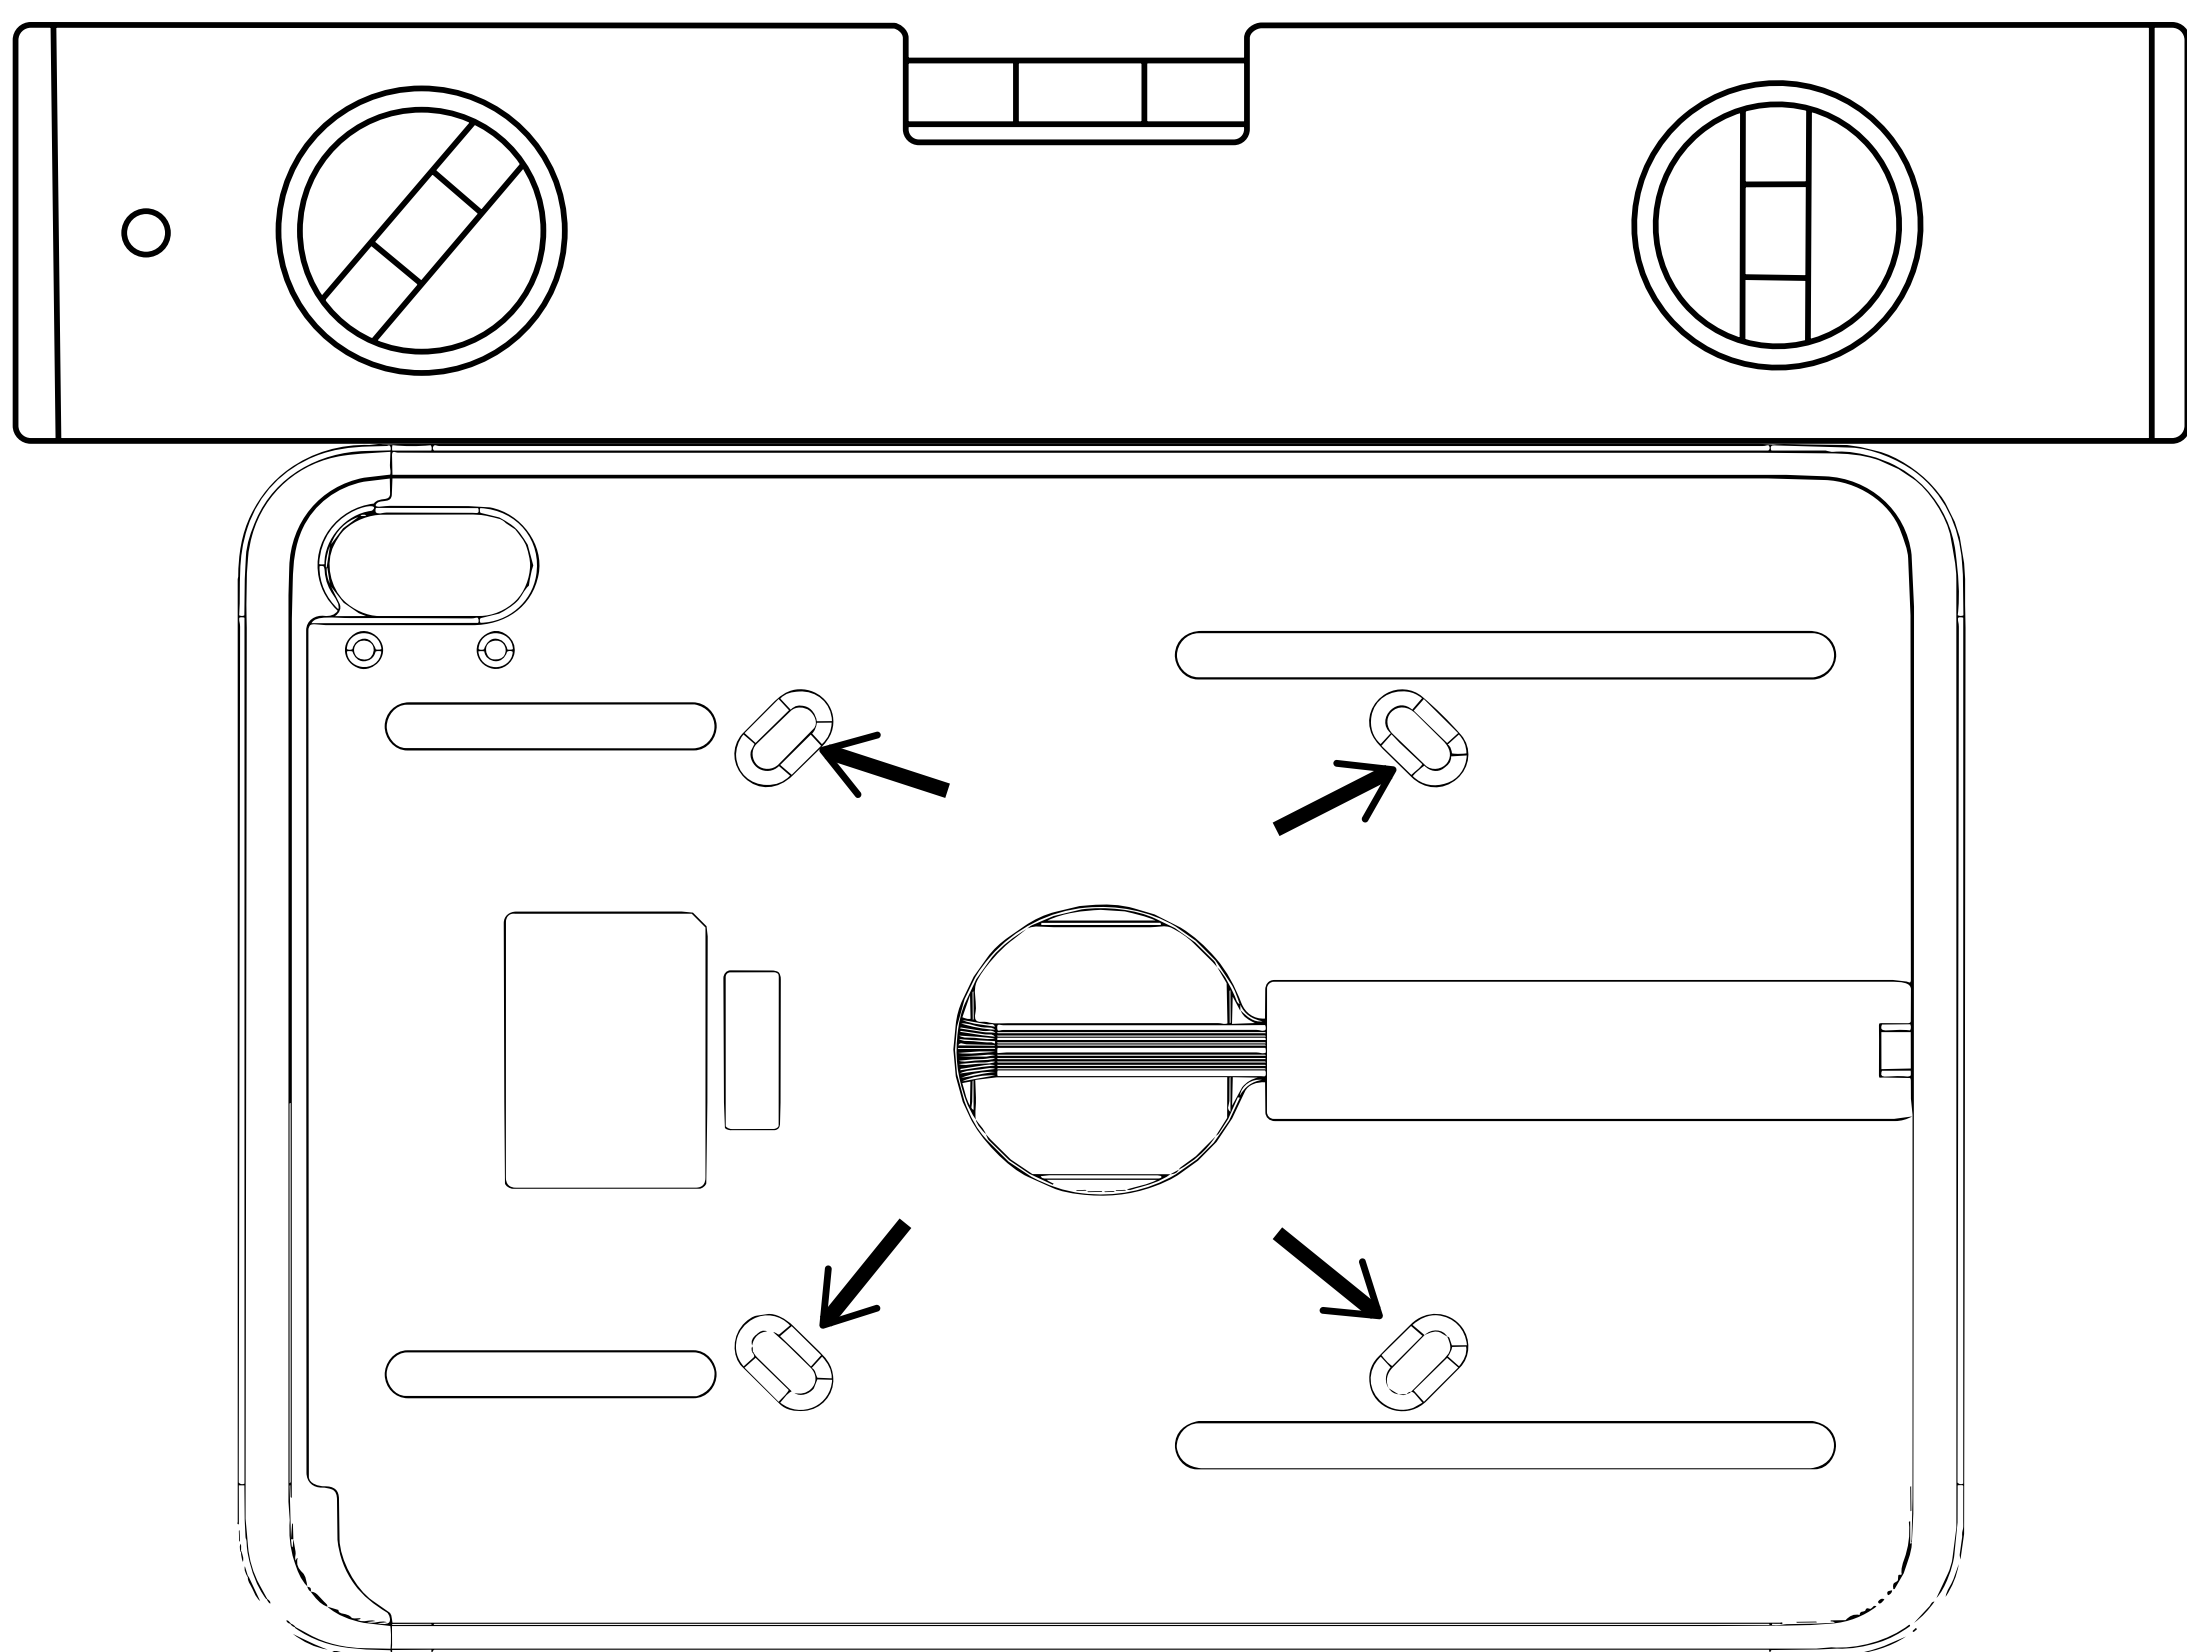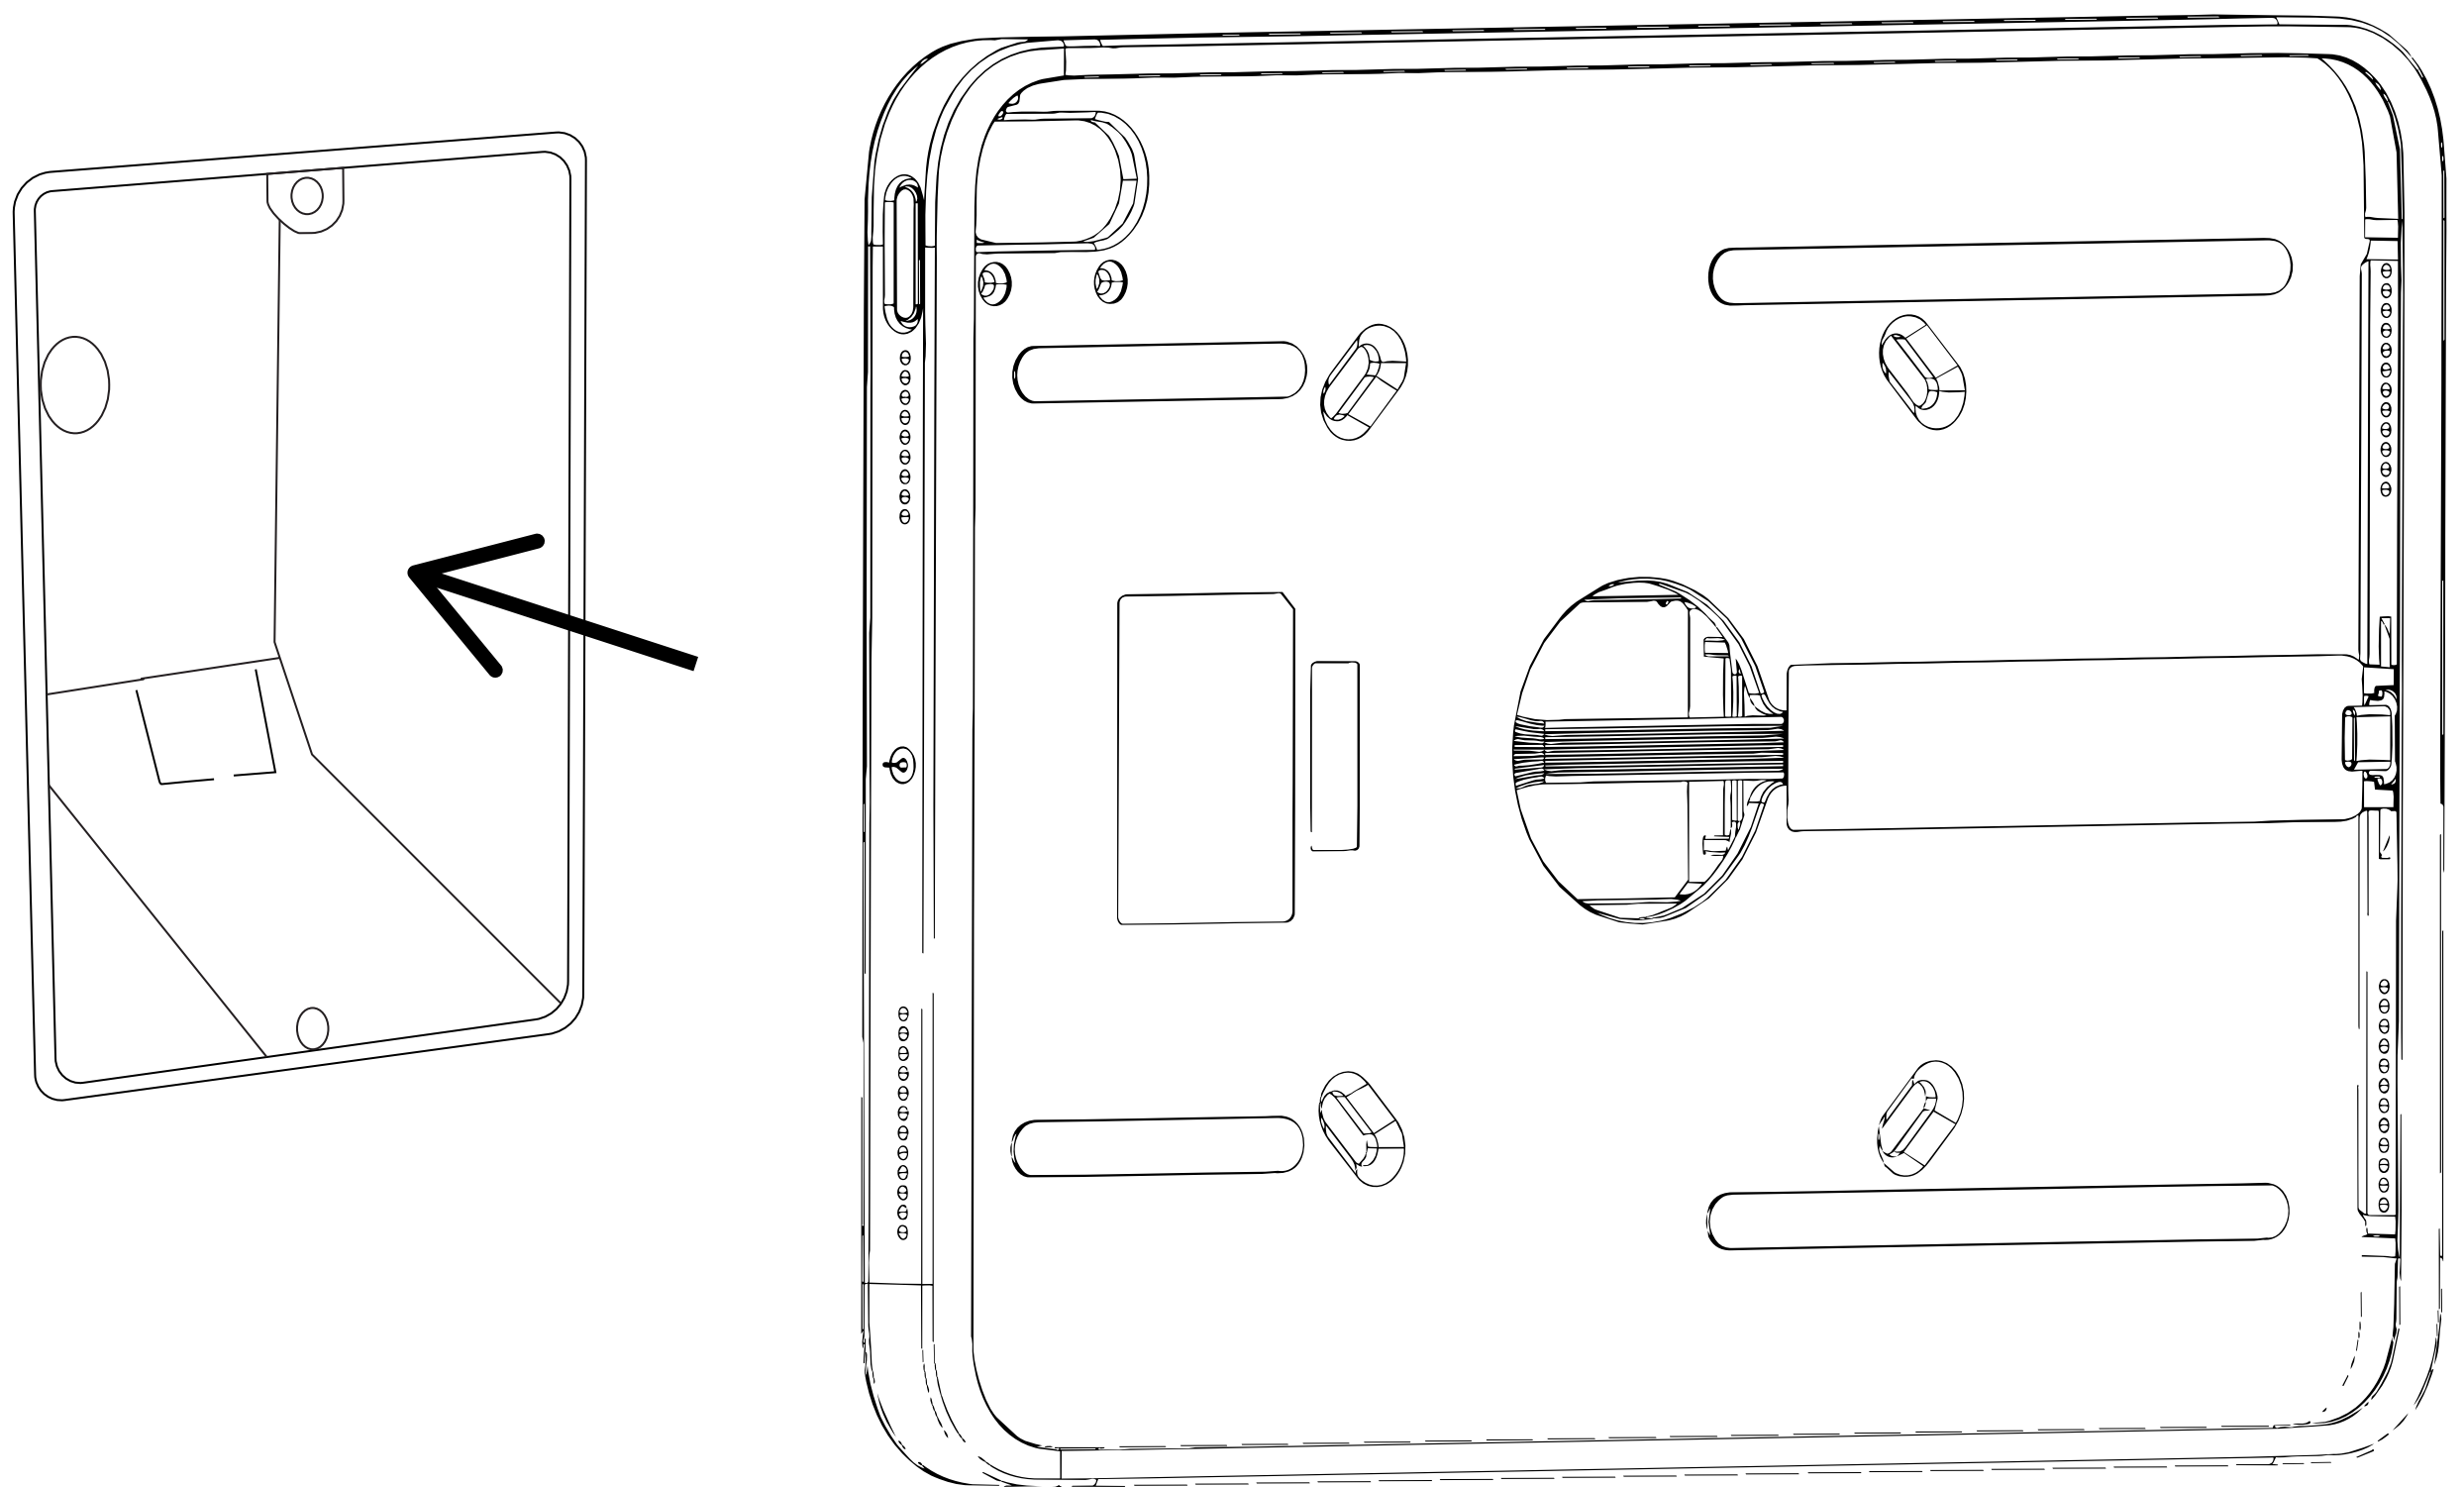


# LUXE

## SURFACE MOUNT

4. Install the 4 drywall anchors into the wall.



**Run a minimum Cat5e cable to the desired location of the LUXE SURFACE MOUNT.**

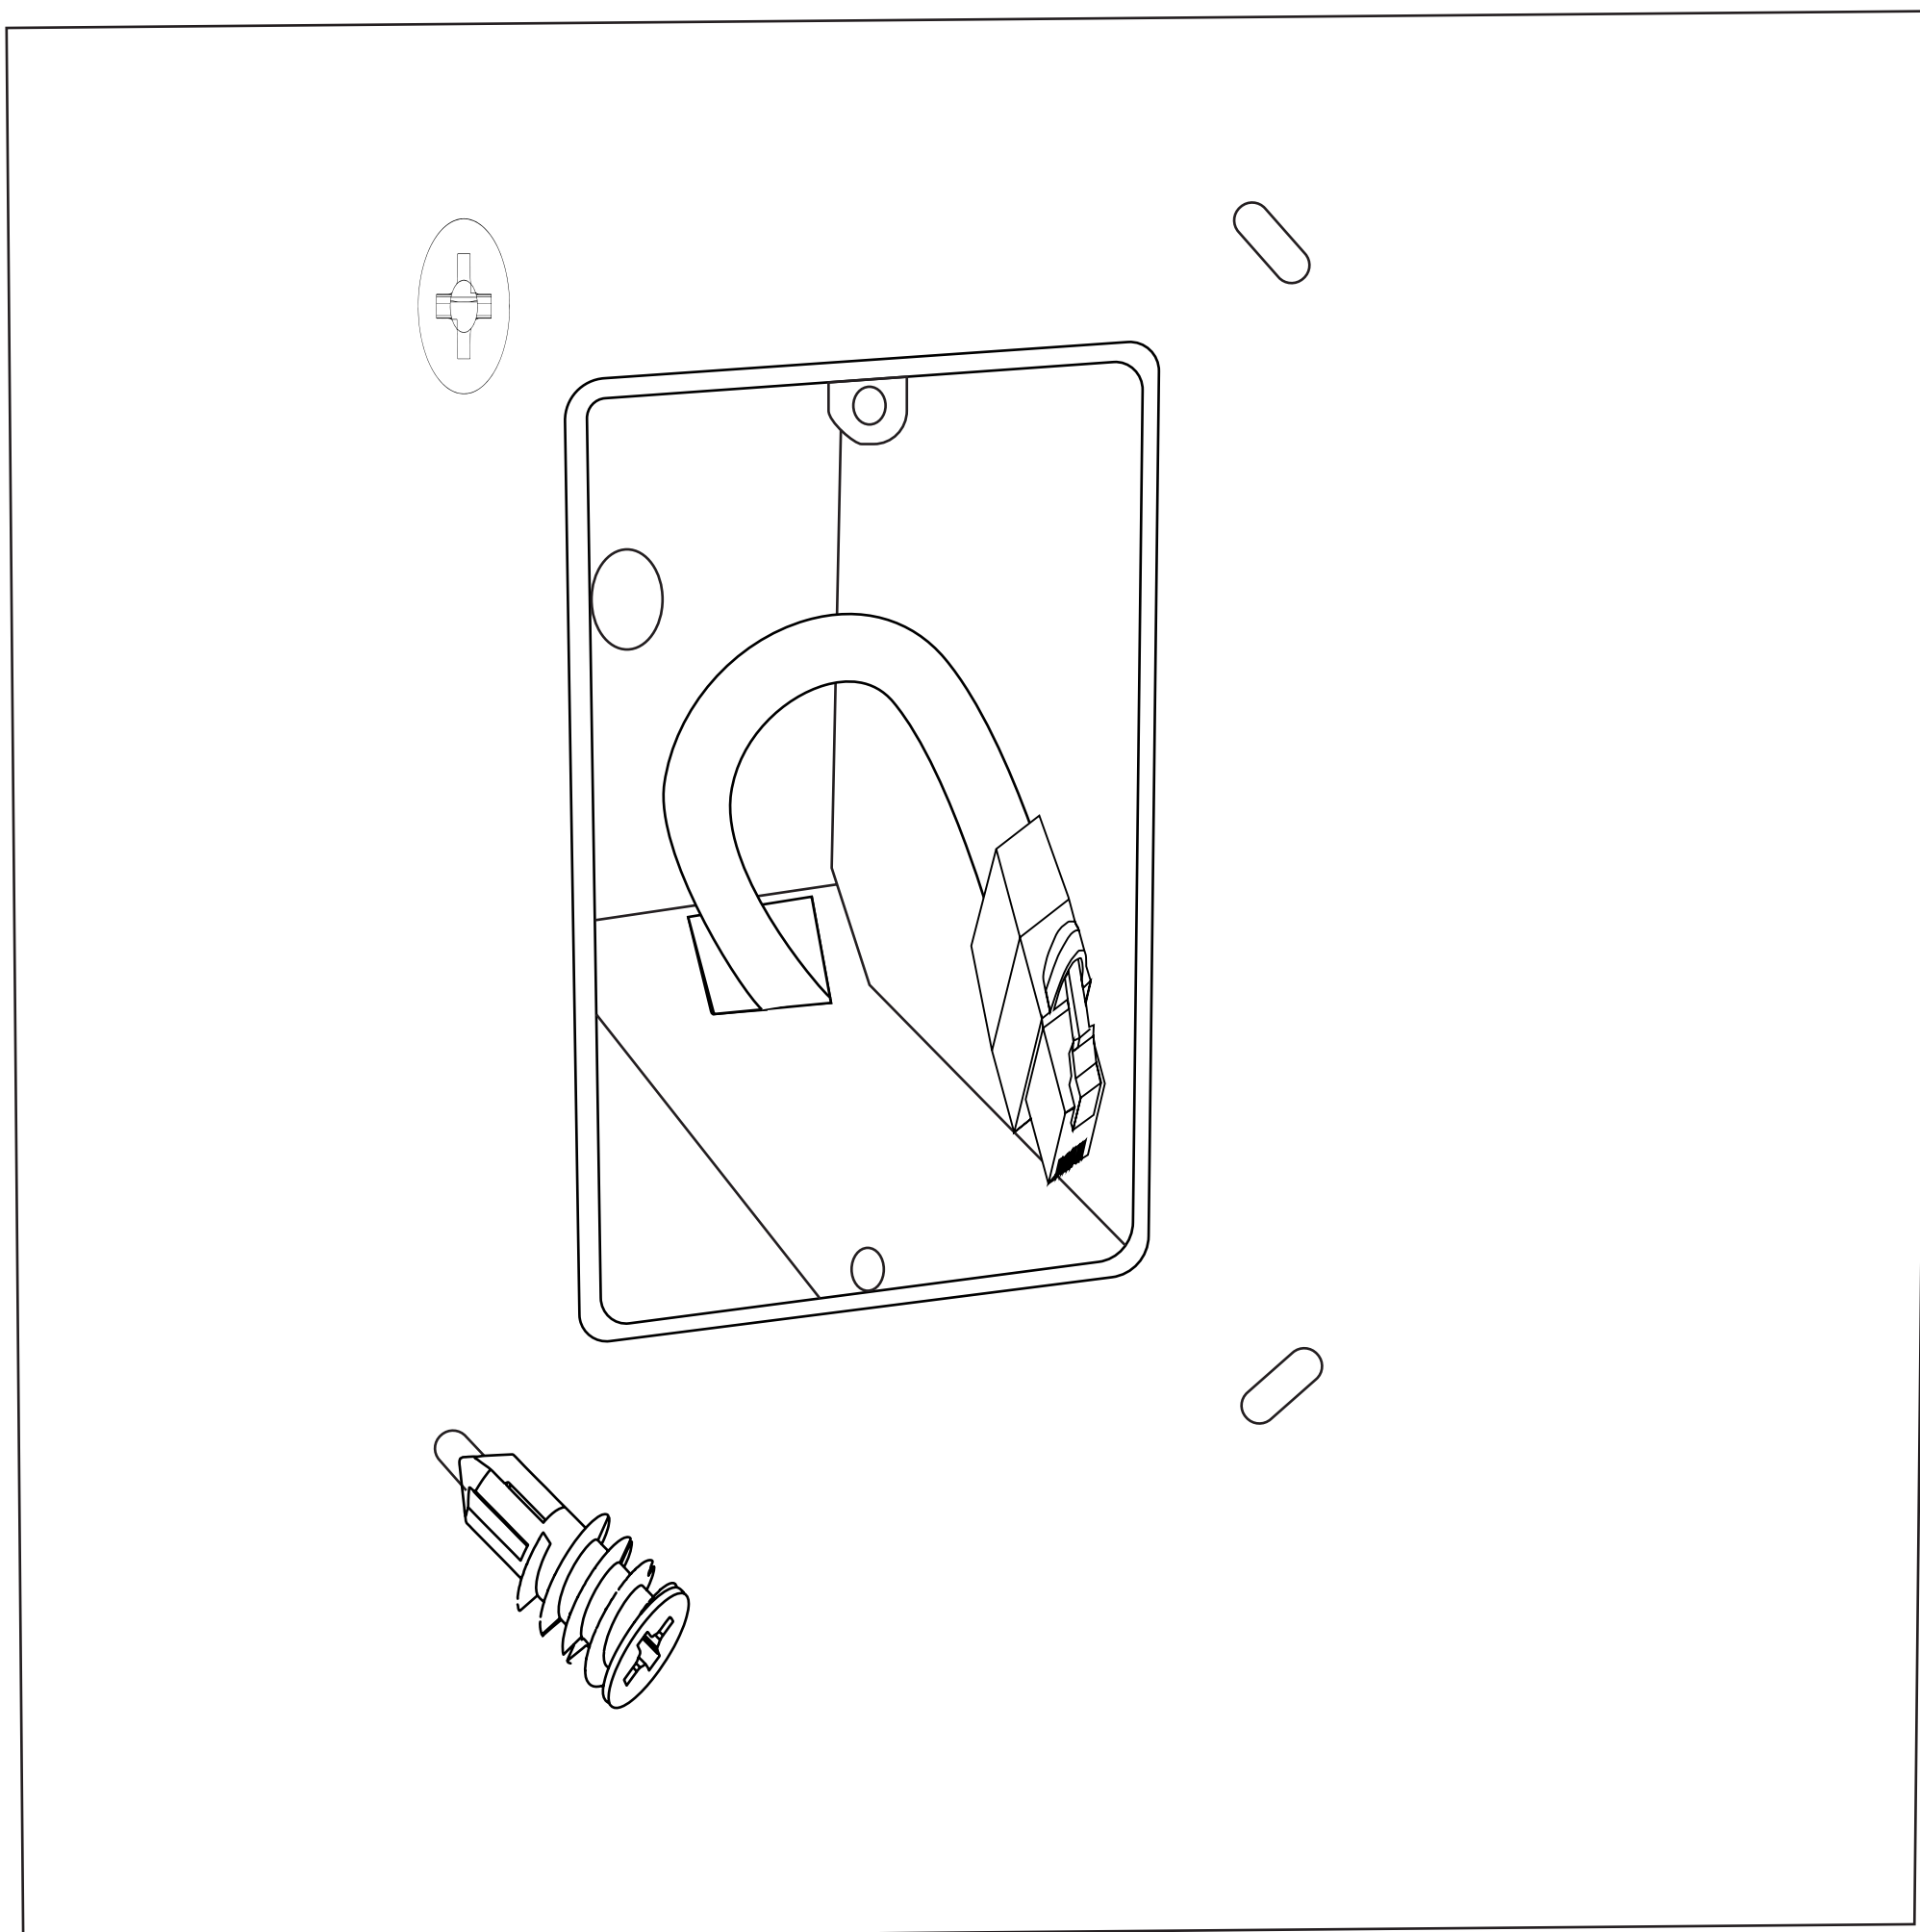

# LUXE

## SURFACE MOUNT


- 5. Connect the Cat5e cable into the back of the PoE+ Adapter on the LUXE SURFACE MOUNT. Place the LUXE SURFACE MOUNT over the electrical gang box or hole and install the 4 screws into the drywall anchors. Do not fully tighten**

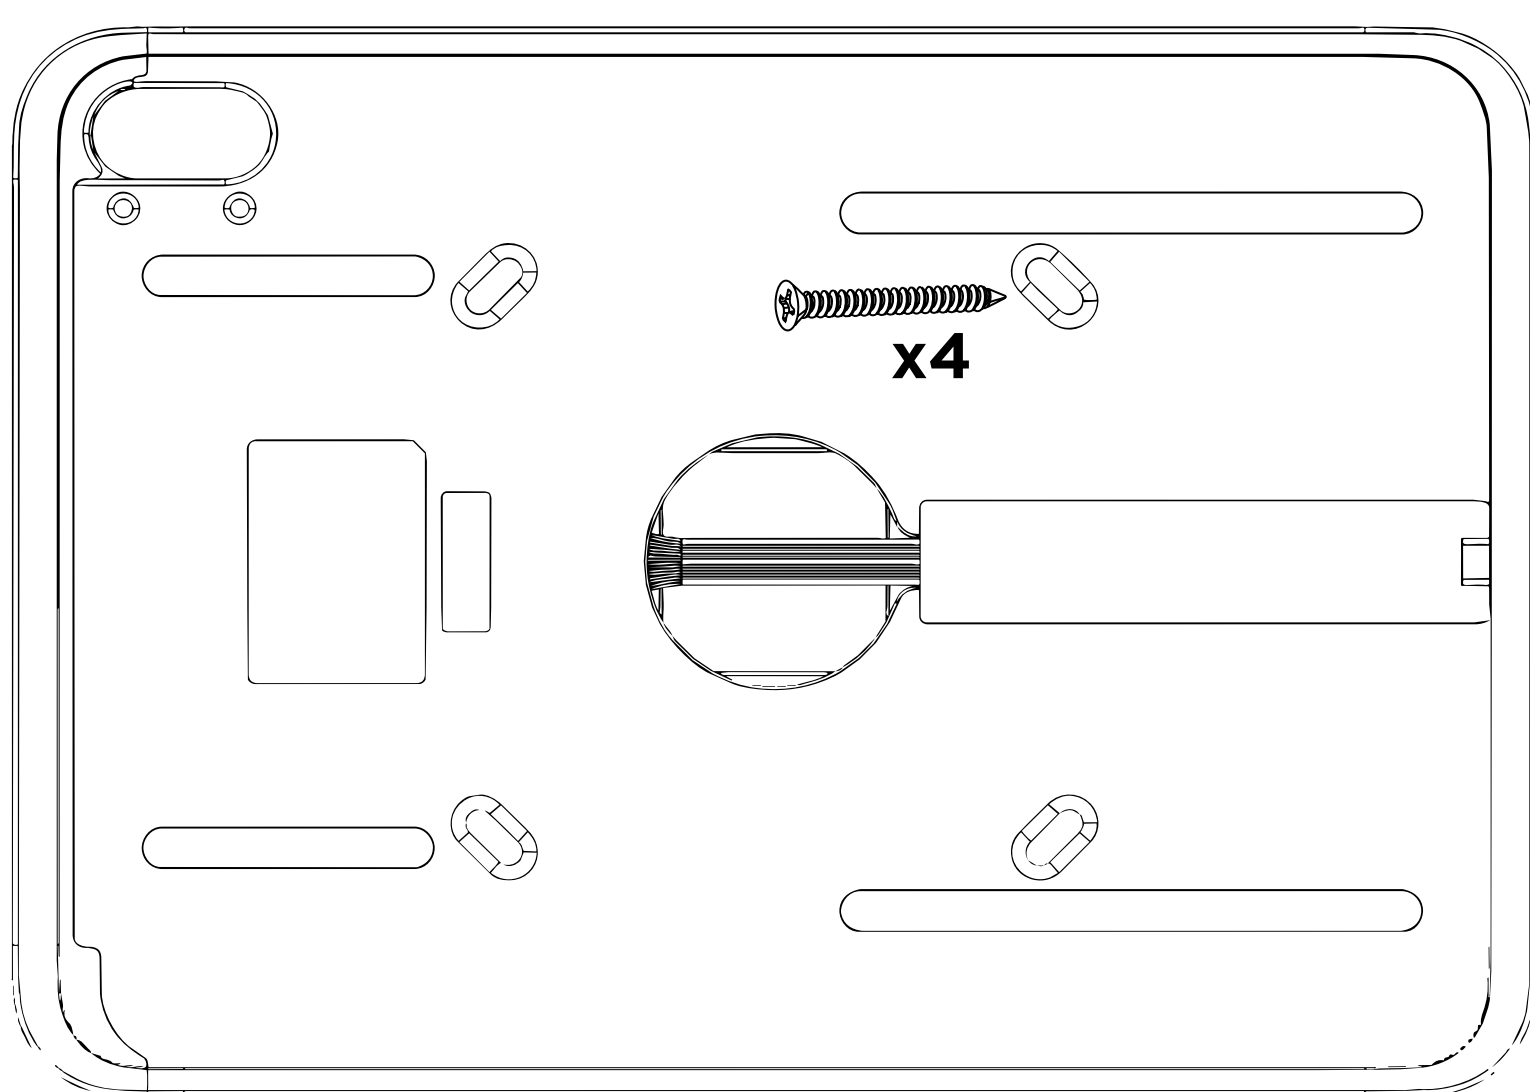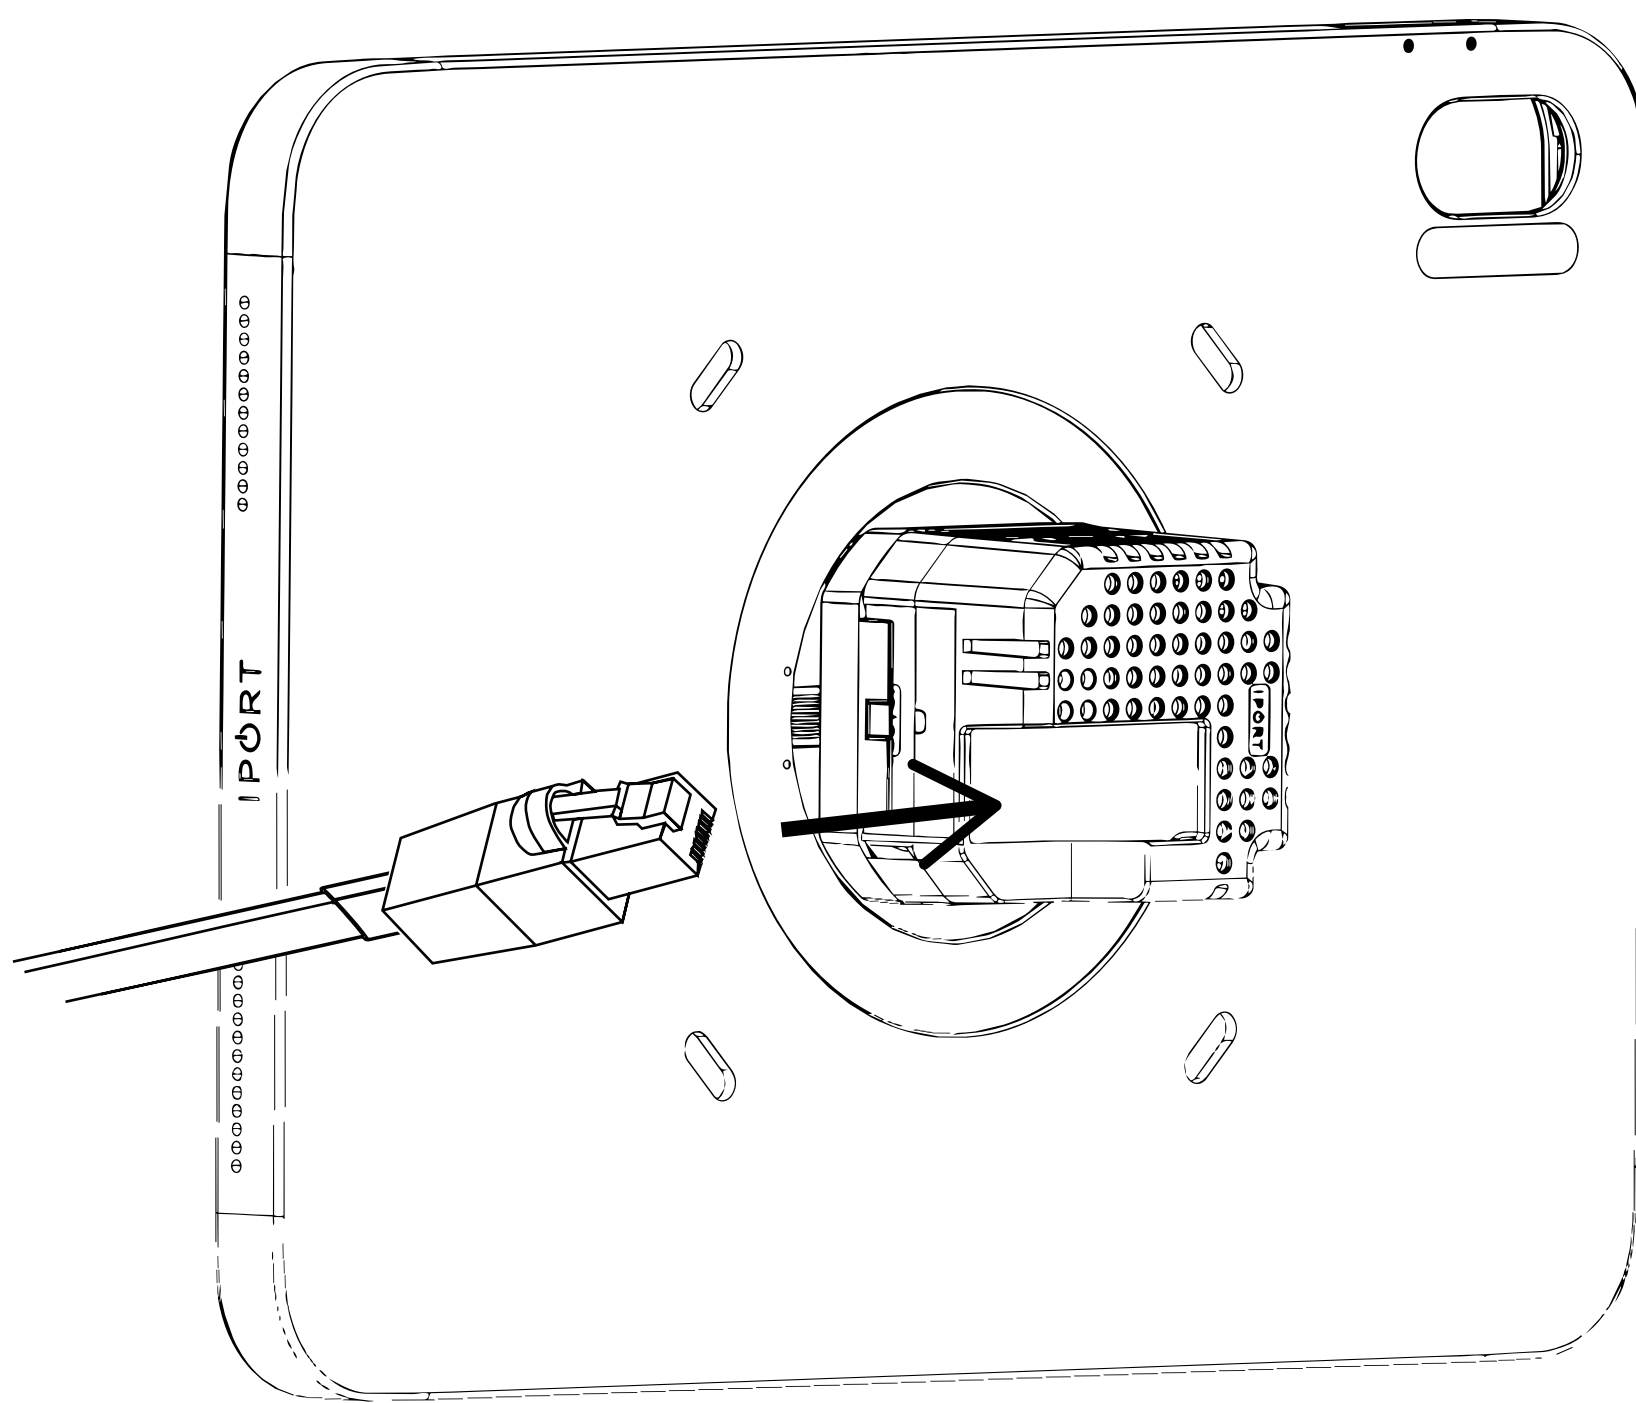

# LUXE

## SURFACE MOUNT



6. Use a level to level the LUXE SURFACE MOUNT and finish tightening the 4 screws by hand.

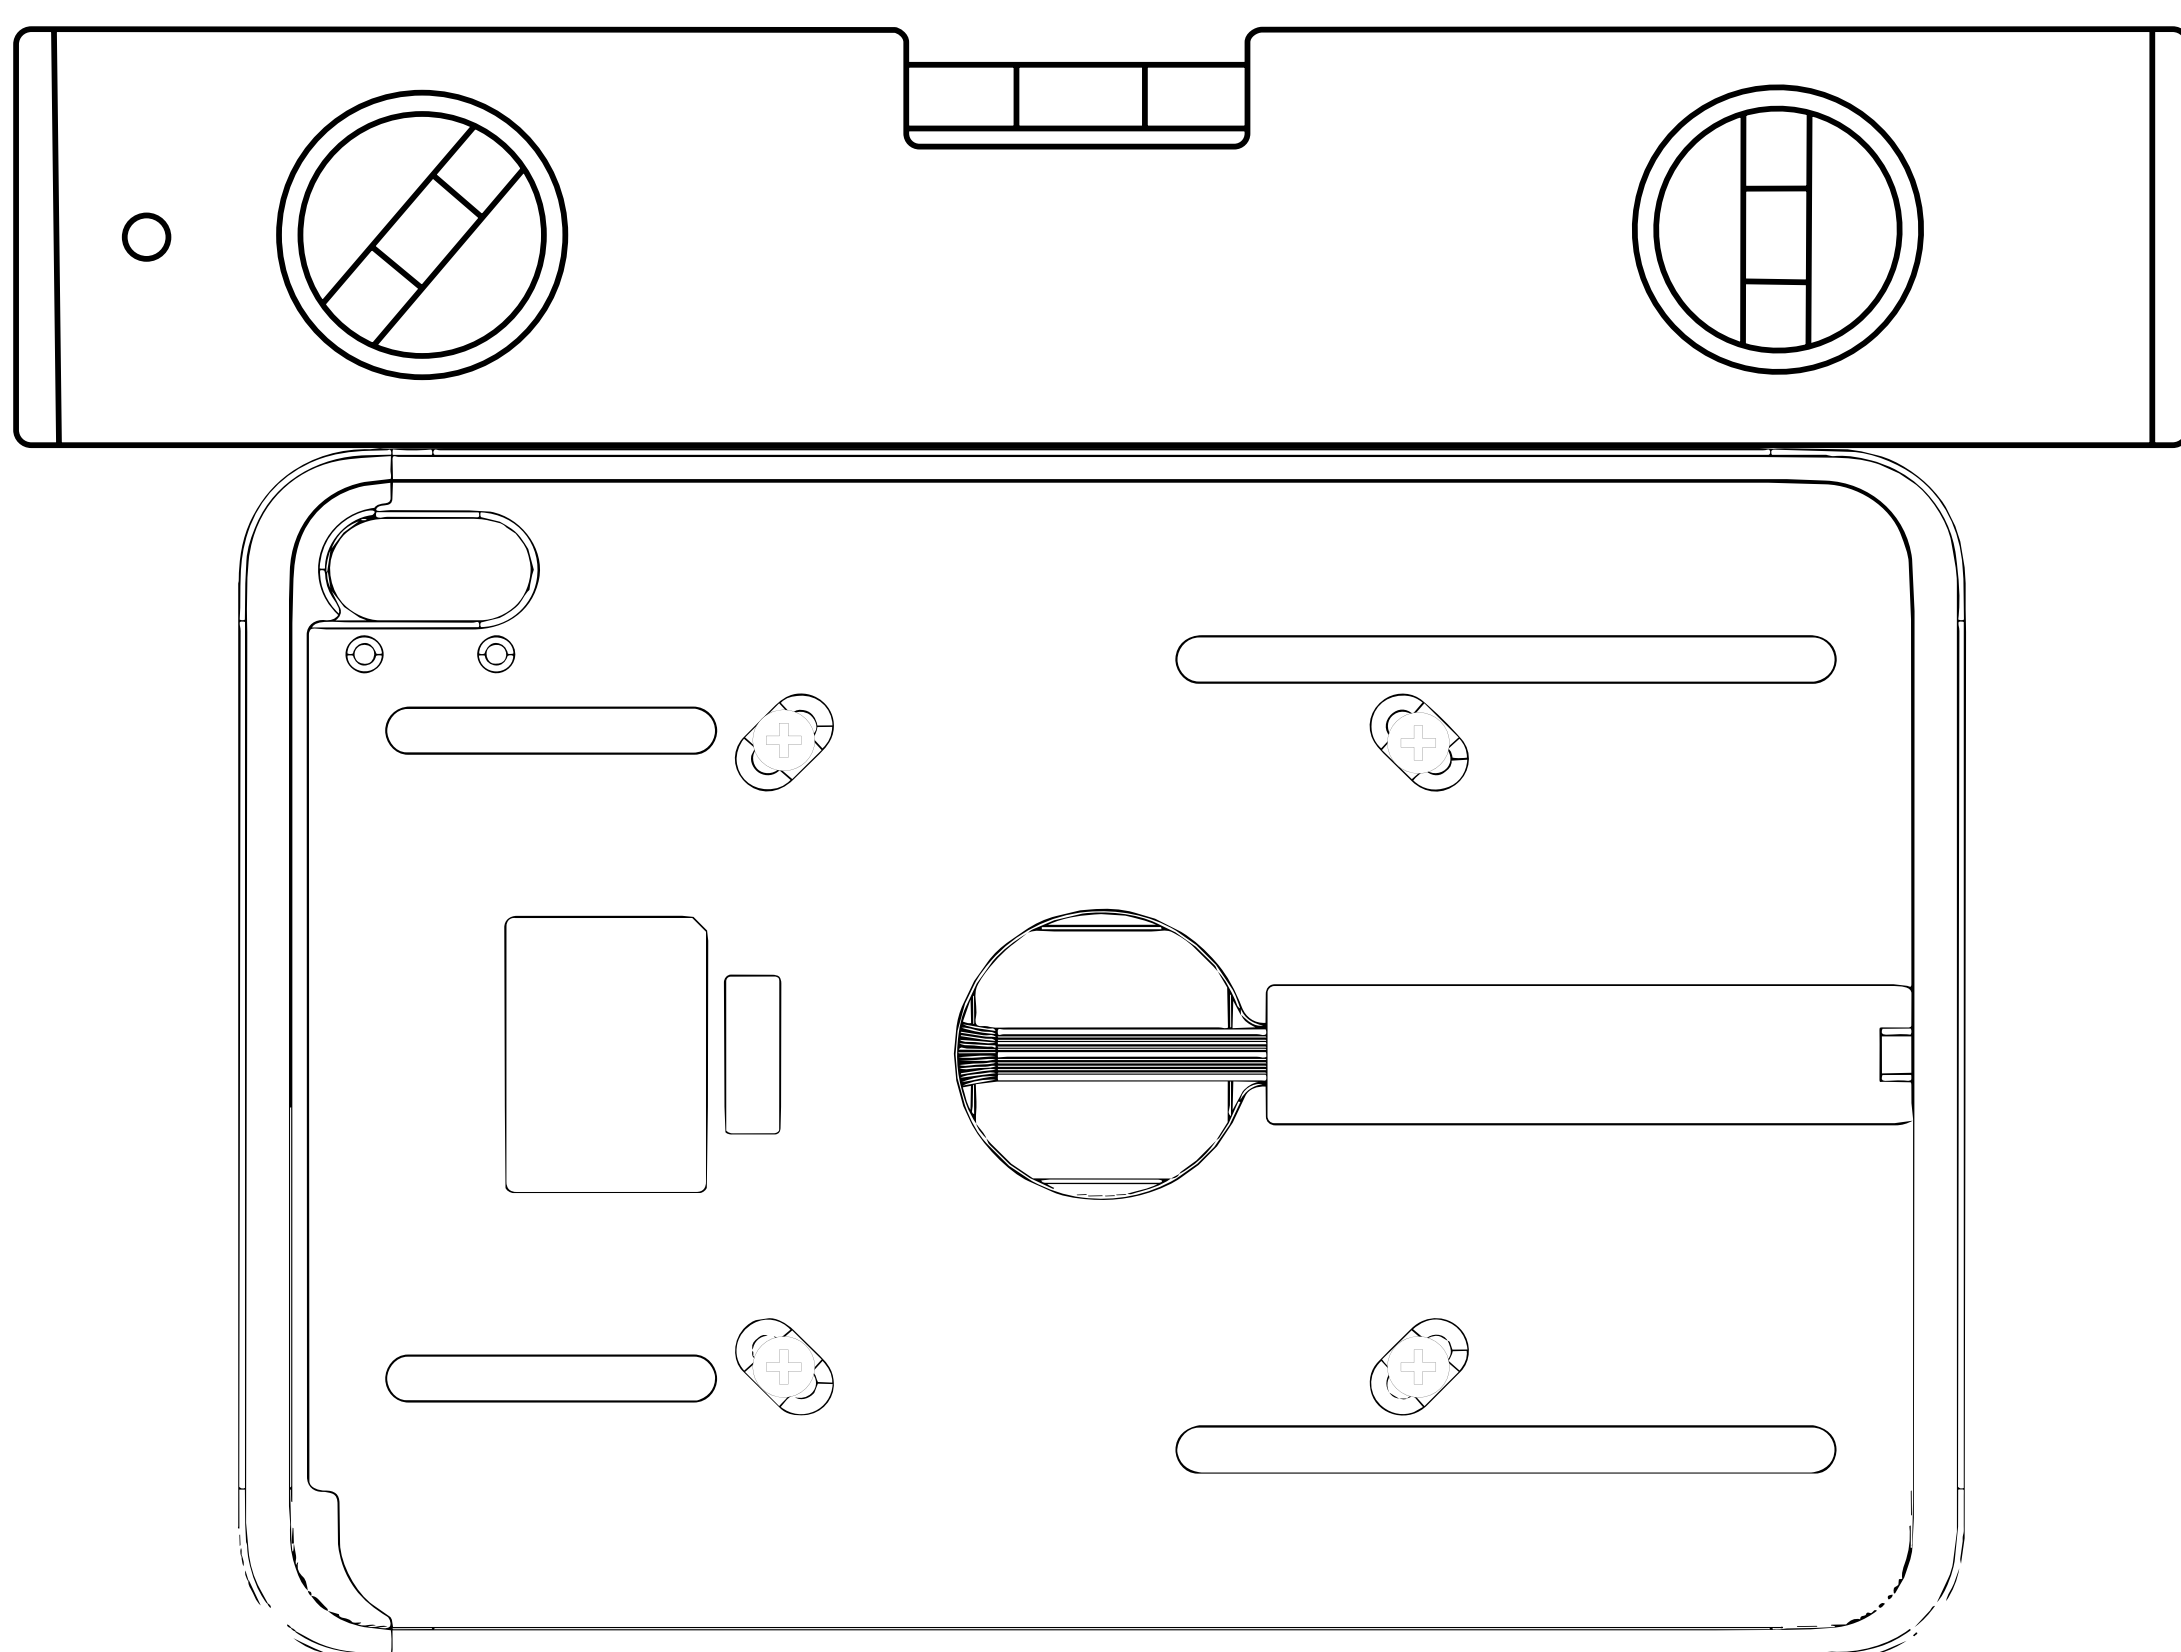

# LUXE

## SURFACE MOUNT



- 7. Remove the top of the enclosure from the long half and insert your iPad.**

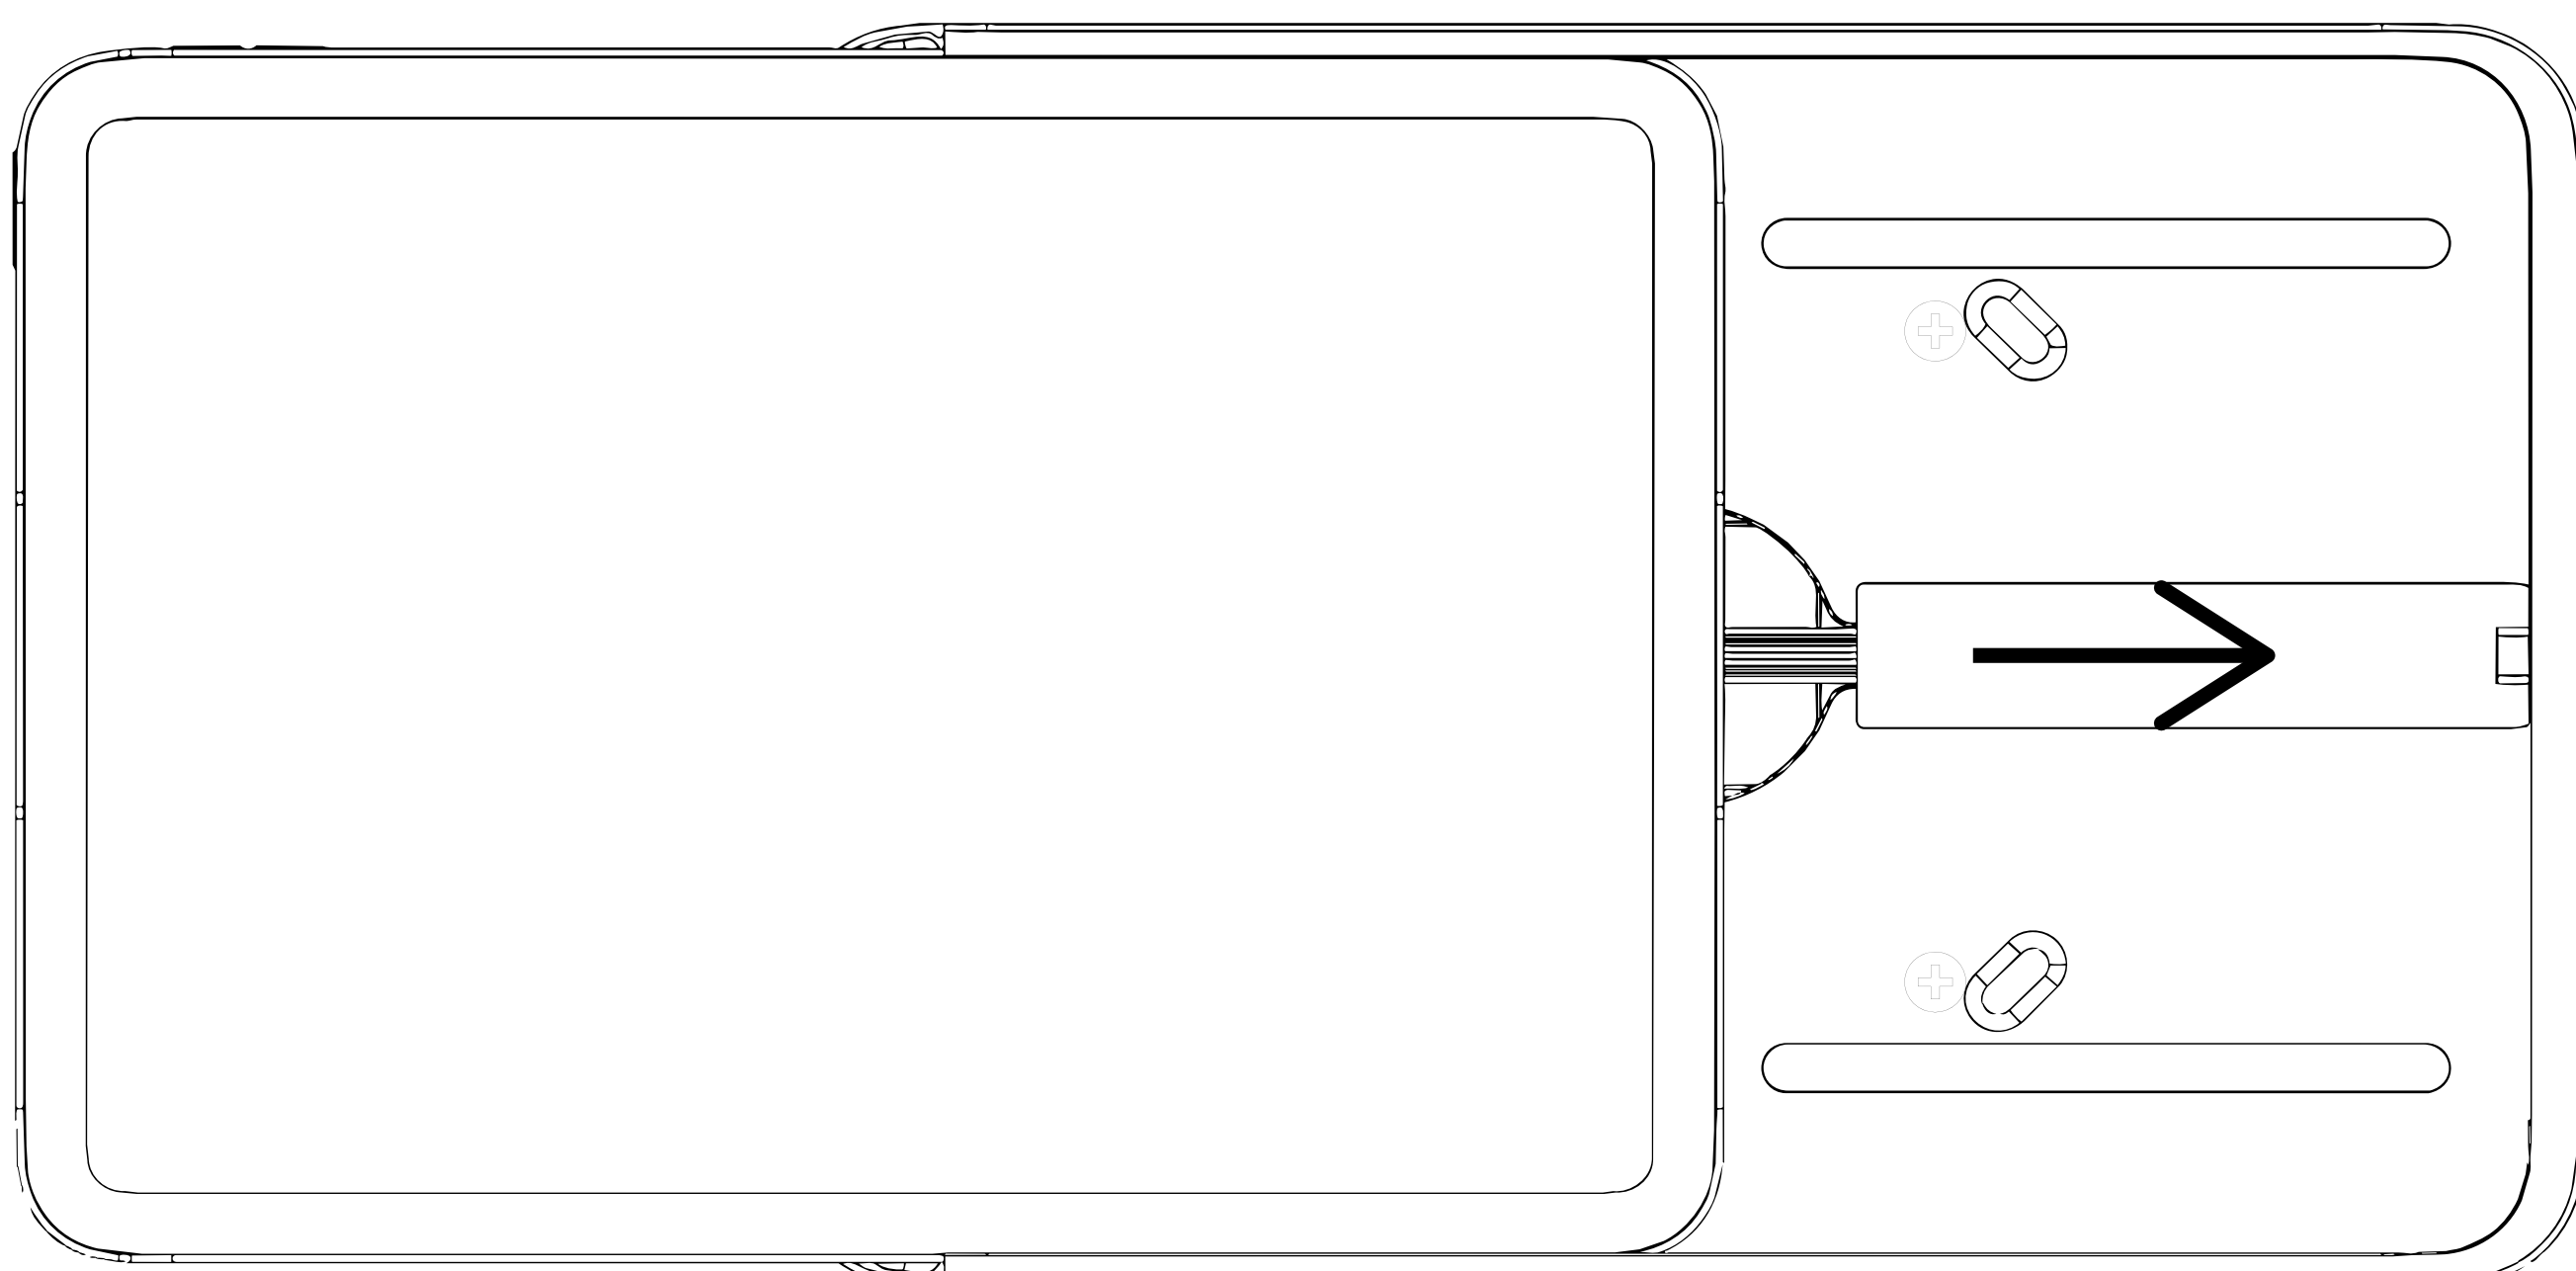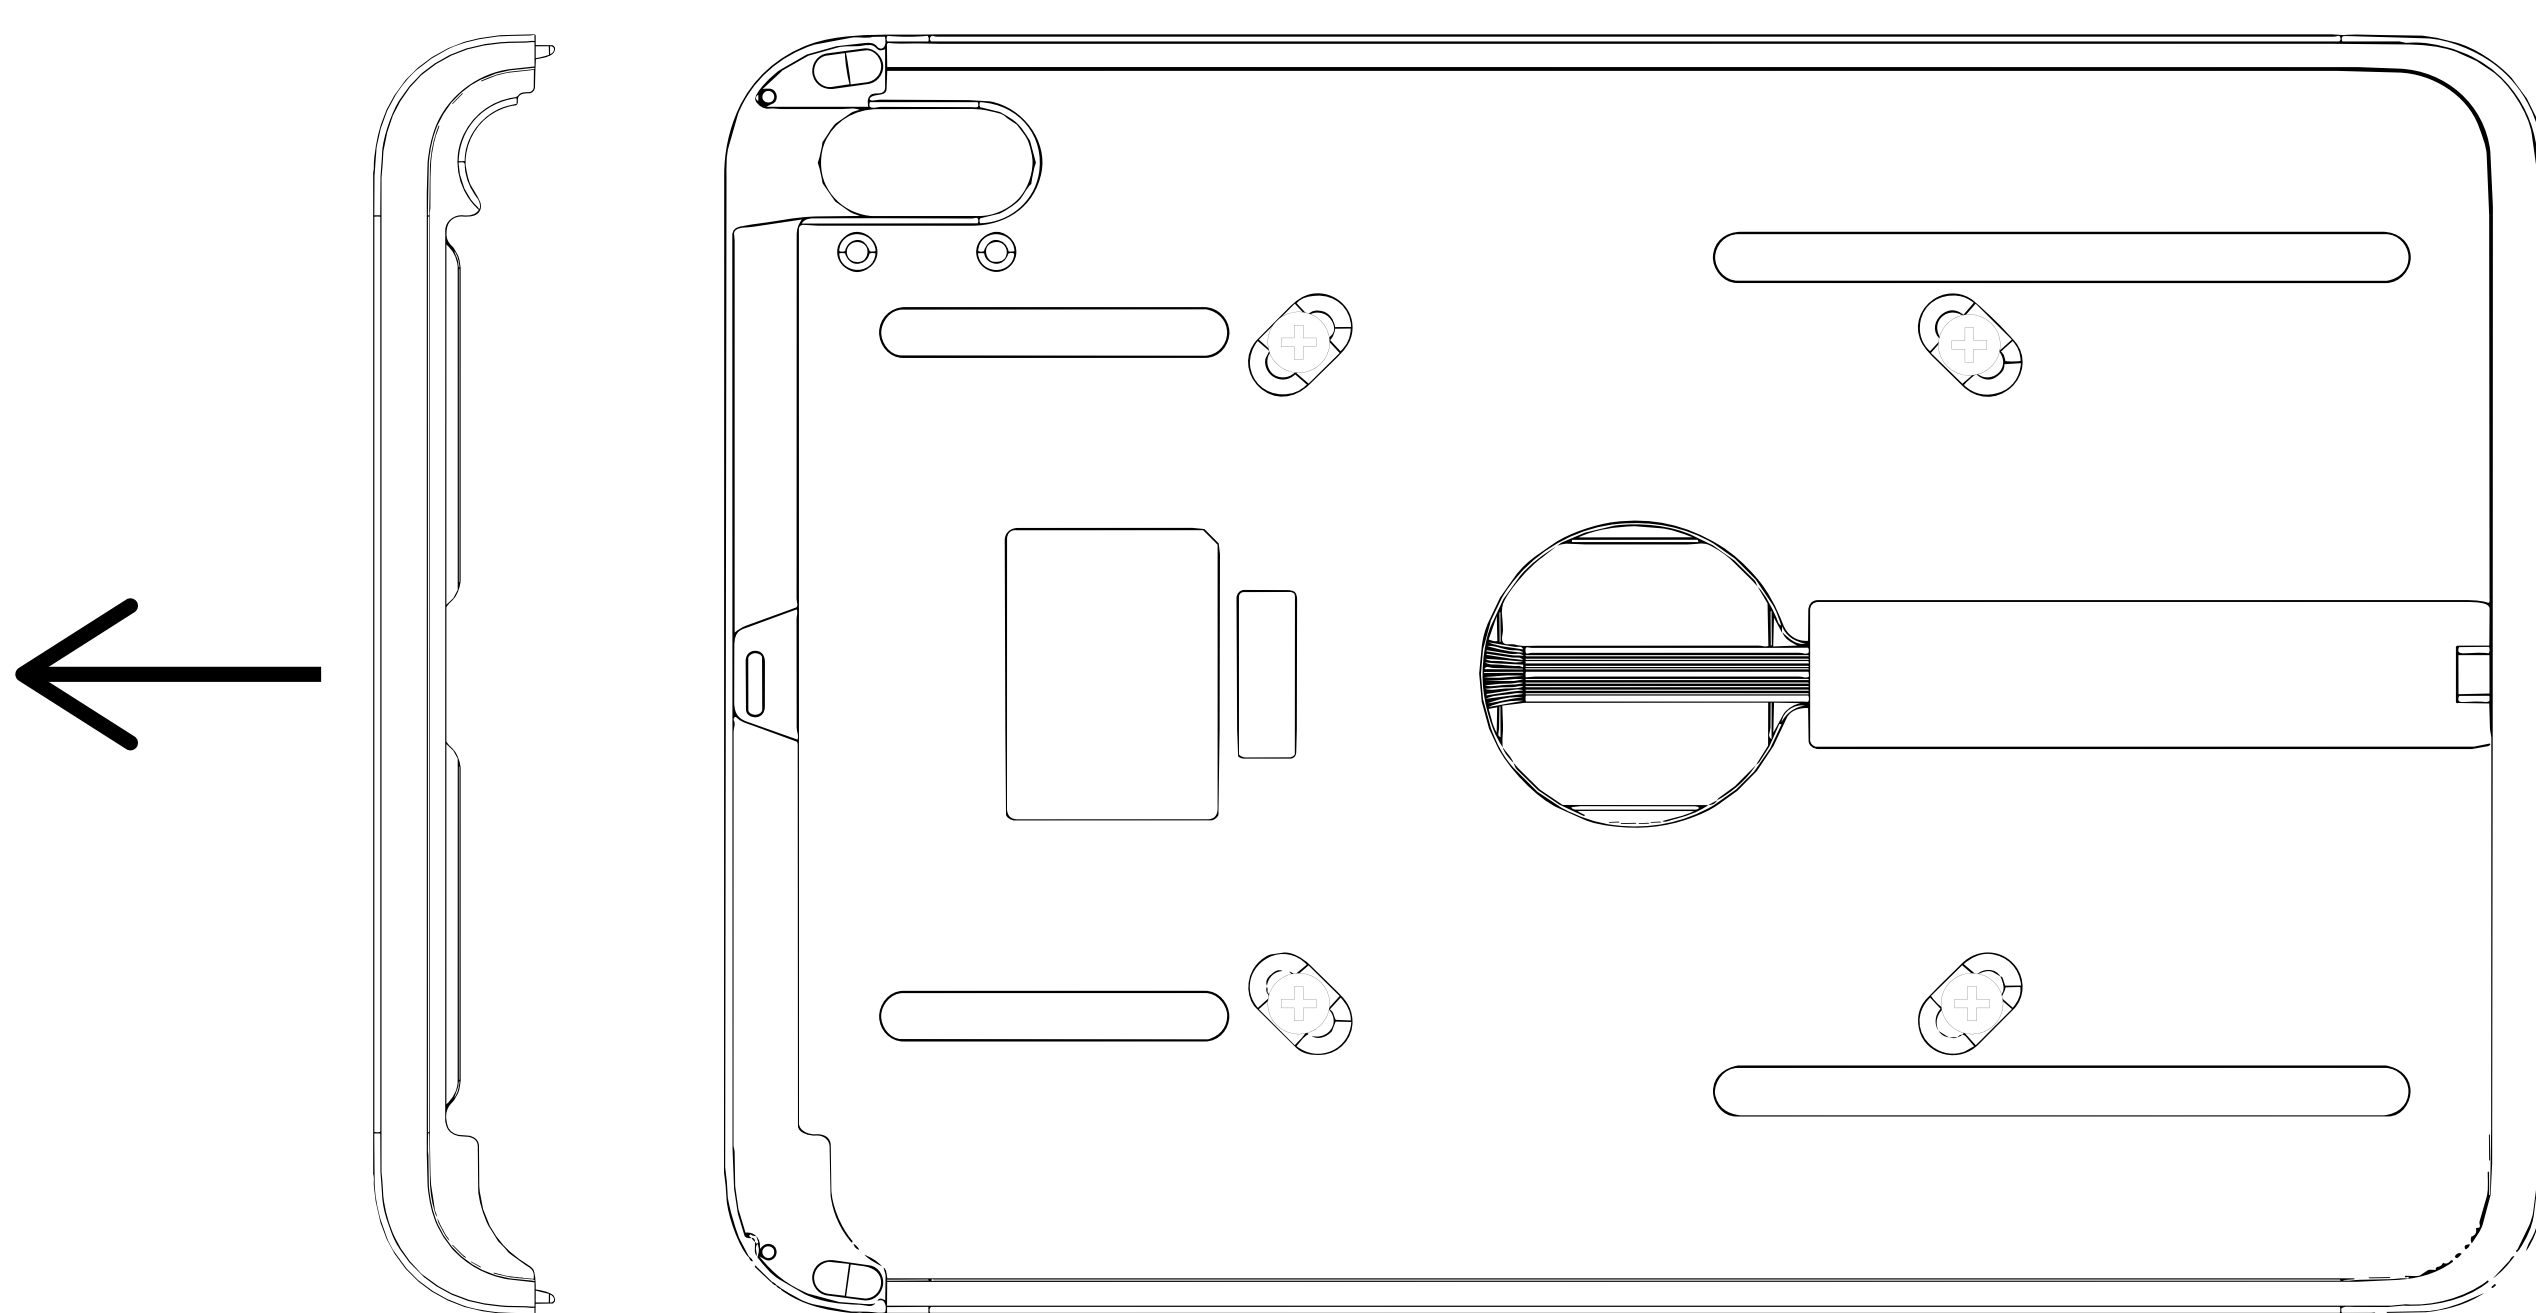

# LUXE

## SURFACE MOUNT

- 8. Reinstall the enclosure top half. Use the provided security tool to lock the enclosure together by turning the lock 1/4 turn clockwise.**

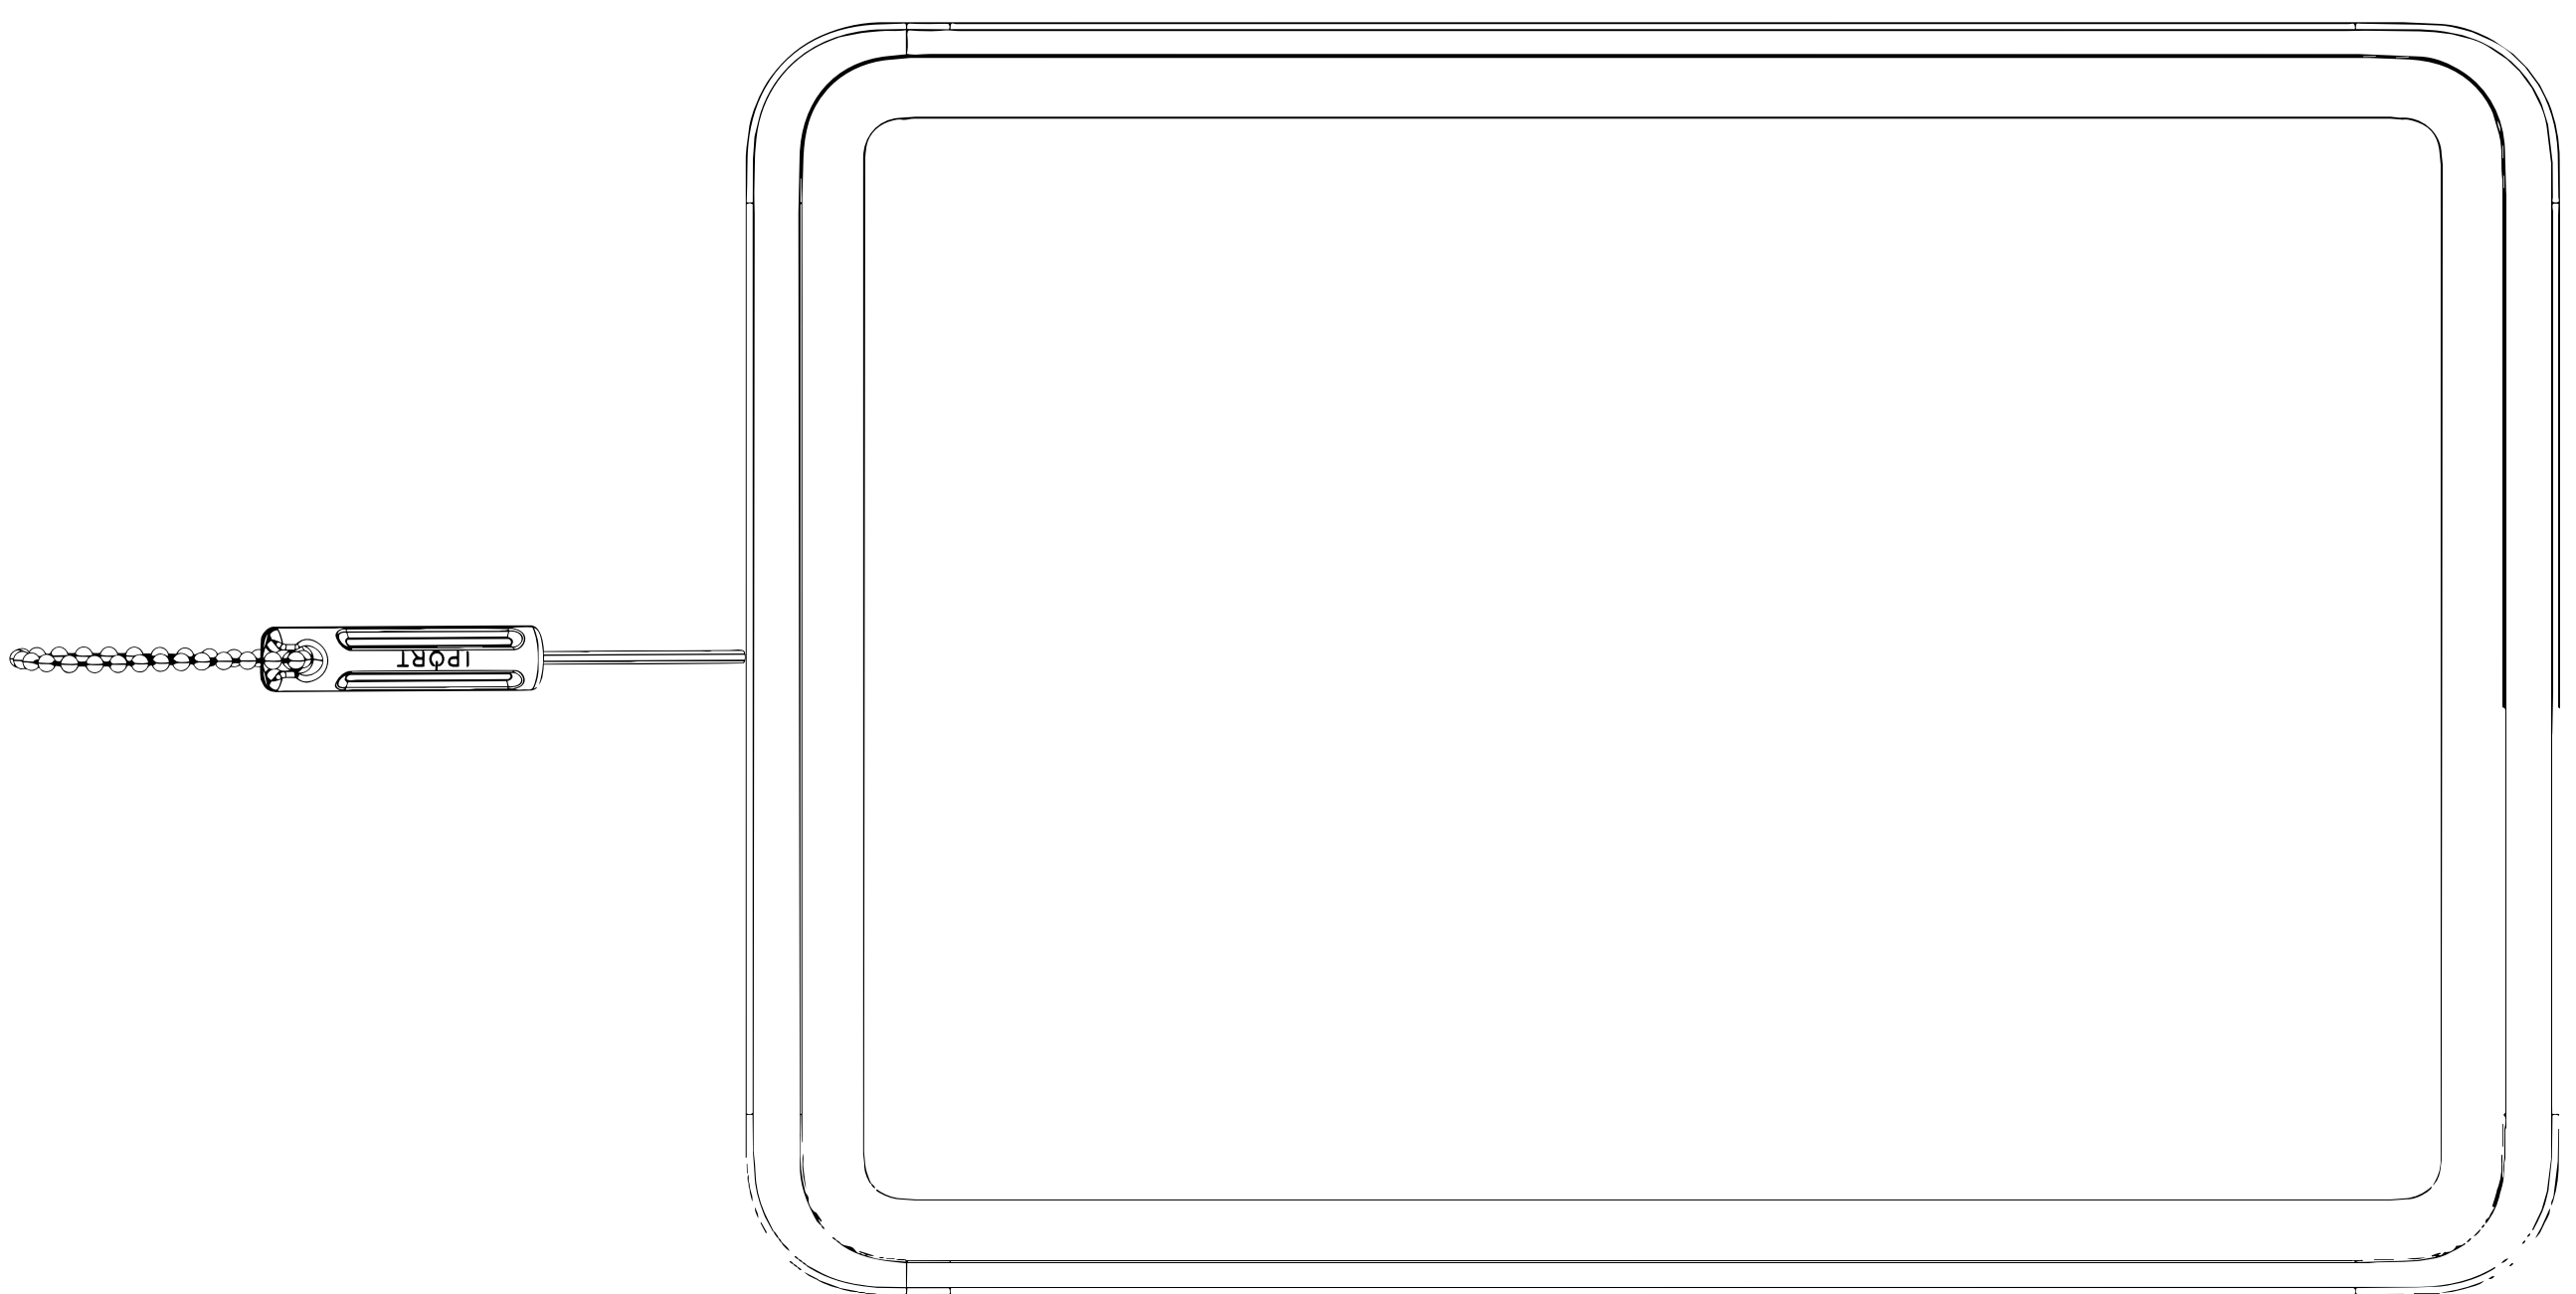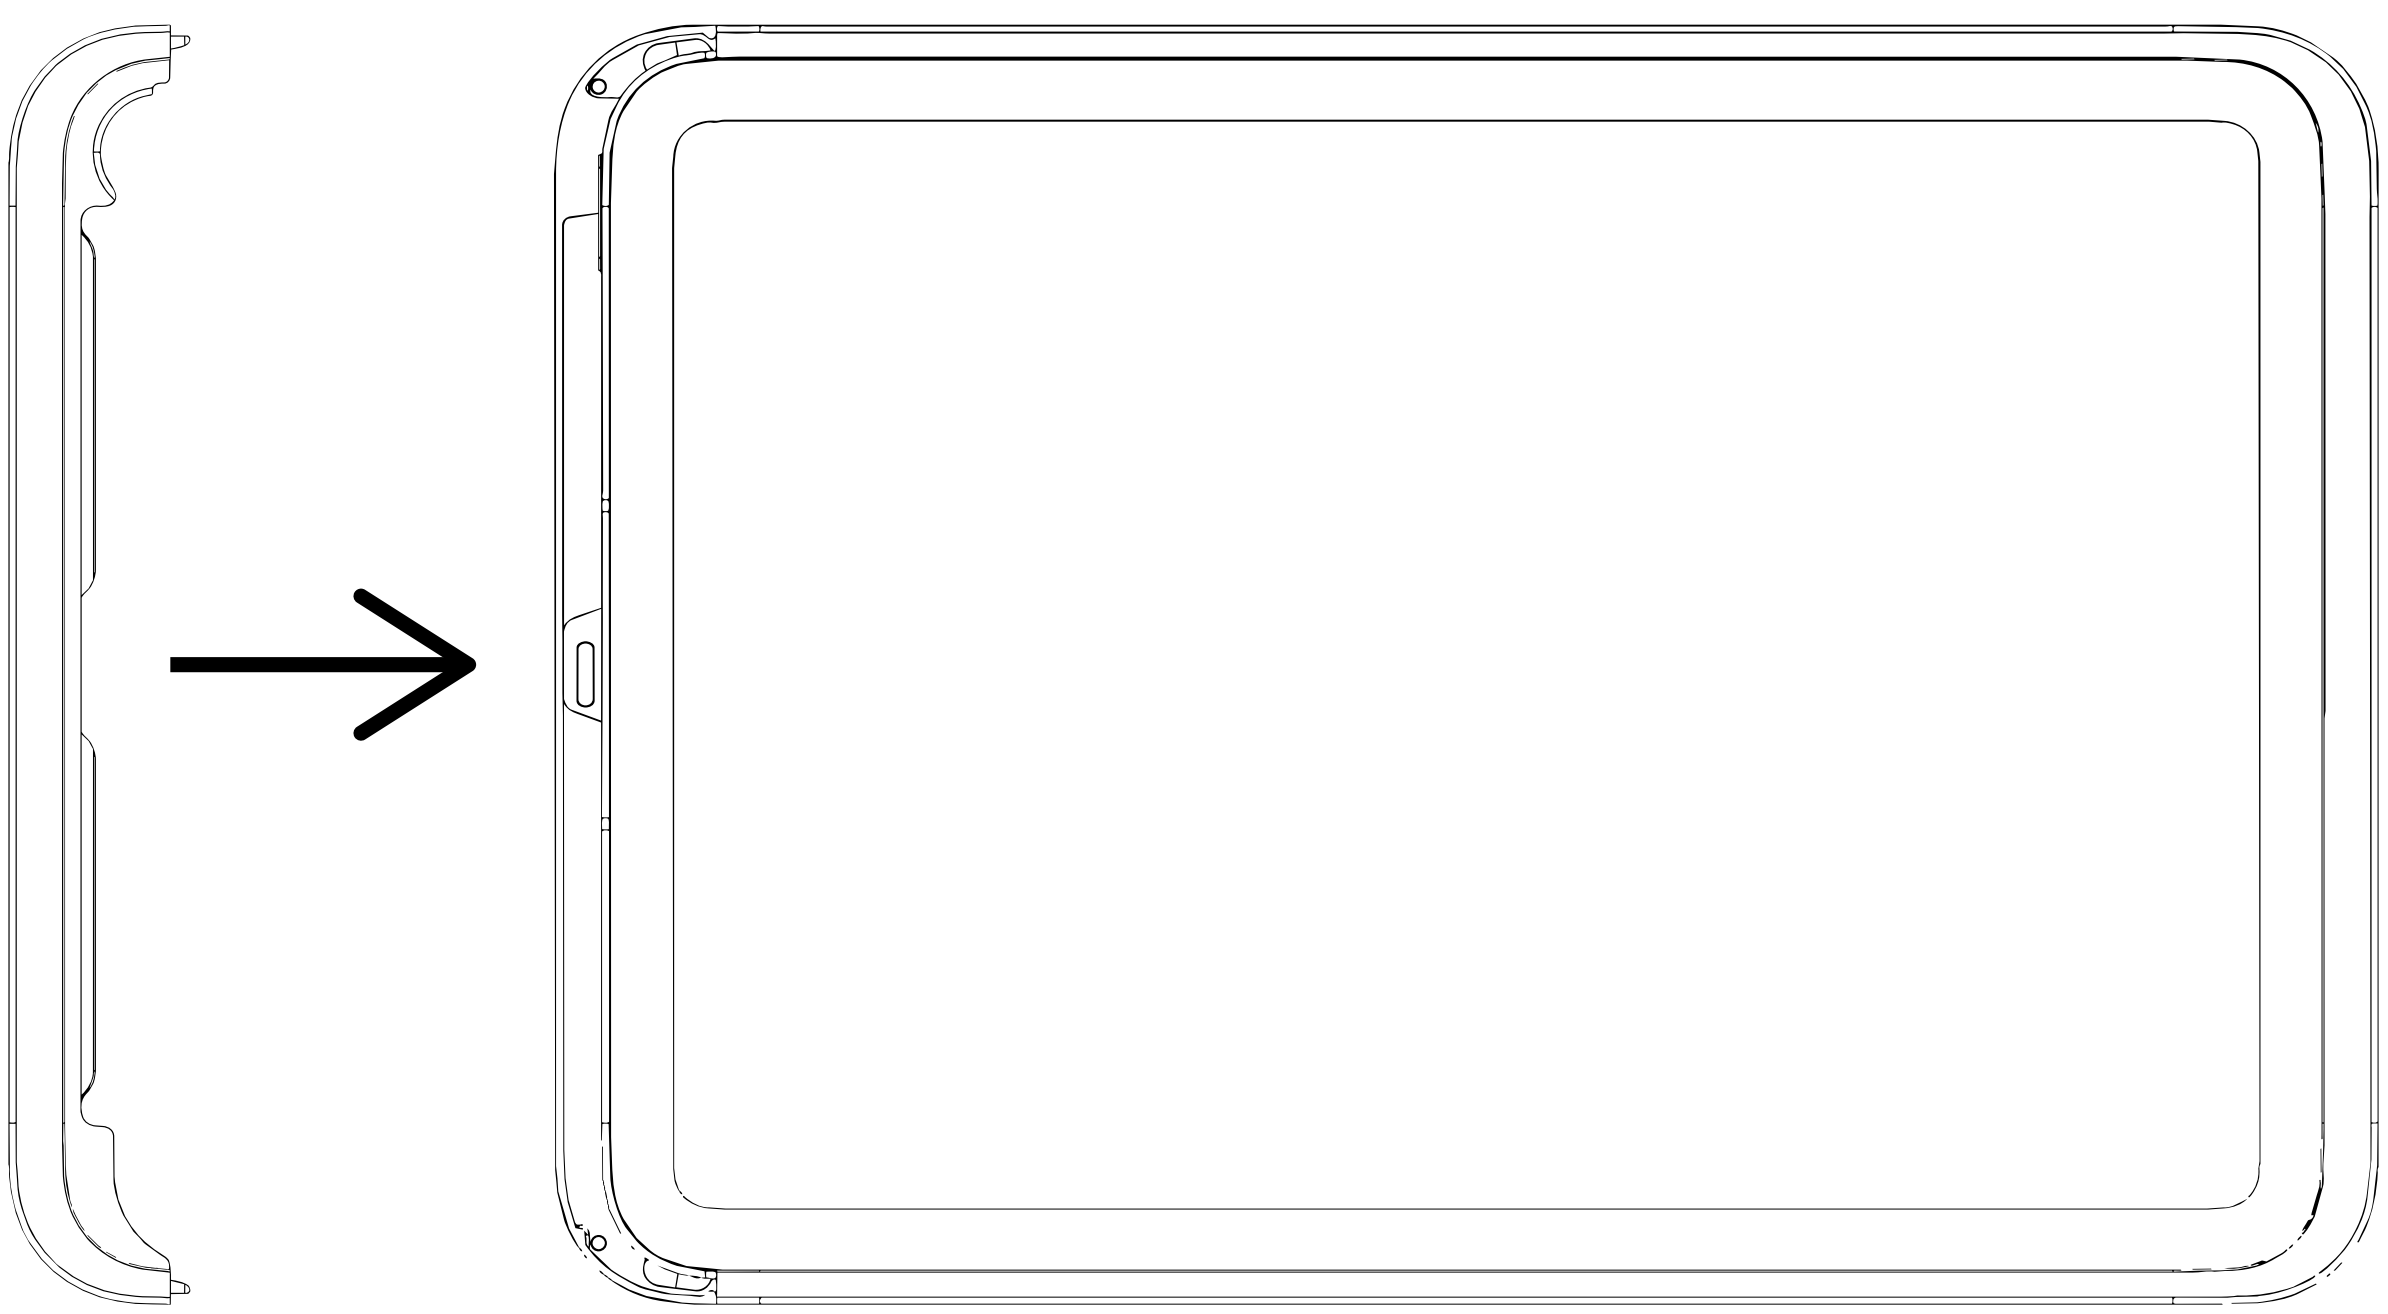

# LUXE

## SURFACE MOUNT

9. **Once the LUXE SURFACE MOUNT is connected to a PoE+ Switch or Injector, verify the iPad is receiving power.**

# LUXE SURFACE MOUNT

## REGULATORY AND SAFETY INFORMATION

### FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

### CANADA WARNING (ISED)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device."

### IMPORTANT SAFETY INSTRUCTIONS

You should always follow these basic safety precautions when using your IPORT products to reduce the risk of fire, electric shock, and injury to persons.

1. Read all the safety and operating instructions before operating your IPORT product.
2. Do not store and expose your device to high temperatures including heat caused by intense sunlight or placing on hot surface. Do not place device in fire or other excessively hot environments.
3. Do not disassemble or modify this device unless instructed to do so in this user manual.
4. If this device is accessible to or may be used by a minor, purchasing adult agrees to be solely responsible for providing instructions and supervision. Purchaser agrees to defend, indemnify, and hold Manufacturer harmless for any claims or damages arising from unintended use or misuse by a minor.
5. Do not submerge in water or liquid or expose device to excessive water not reasonable for normal use as described in the user manual.
6. IPORT products are of high quality and go through quality assurance inspections. However, if you notice abnormal operation or device is getting excessively hot, immediately stop all product use and contact manufacture.
7. CAUTION: To prevent Electric Shock, do not use the polarized plug with an extension cord, receptacle, or other outlets unless the blades can be fully inserted to prevent blade exposure.
8. Power Cord Protection: Route power supply cords so they will not be walked on or pinched by Items.